



## CSP FLAG POLE (4m) WITH UNDERWHEEL BASE

### General description of the product

Foldable flagpole made of anodized aluminium. Mounted on underwheel base.

### Application and use instruction

In extreme weather situations the product should be disassembly/removed from the exposure. It can be used both outside and inside the showroom.

For installation instructions refer to *Appendix 1*.

### Product specification

Terms of use	The product is designed for use in winds up to 22 km/h
Storage conditions	Store in the original package at a temperature of 14-25°C and a relative humidity of 40-65%
Additional remarks	None
Dimensions of the product	CSP flagpole height - 4.1m (flagpole for CSP advertising flag - 80cm x 200cm), CSP underwheel base - 40cm x 16cm x 30cm
Dimensions of the graphic are	-

### Graphics

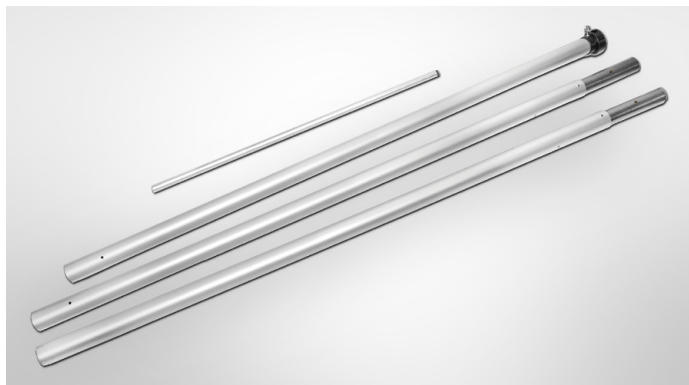


Photo 1



Photo 2



## CSP FLAG POLE (4m) WITH UNDERWHEEL BASE

### Cleaning method

If product is stained, it is advisable to wash its surface with water and a soft cloth.  
**DO NOT use any chemical solvents like petrol, nitro, toluene, etc. to clean the product surface.**

### Warranty

The warranty does not cover mechanical damages!  
The warranty will only cover damages resulting from hidden manufacture or material defects, provided that product was used in line with the instruction manual and its intended purpose and was not modified by unauthorised persons. The warranty period is 12 months from the date of sale. The warranty covers the right to have the product repaired. Since flag fixing bands are consumables and may wear out, they are not covered by warranty. Wearing out is a natural phenomenon and fixing bands should be replaced occasionally. Another natural phenomenon are scratches on the mast left by the fixing bands a result of wind. Any and all obligations arising from the warranty shall be fulfilled within 30 business days. In order for a claim under the warranty to be accepted, the claimant must notify us of any apparent problems with the product by sending an e-mail to [office@cspautomotive.com](mailto:office@cspautomotive.com) or filling in a dedicated contact form within 7 days of the fault being detected.